


**Instruks KM 7**



Slange sett er ferdig fylt, er 10 meter og inneholder også elkabel og kondensslange

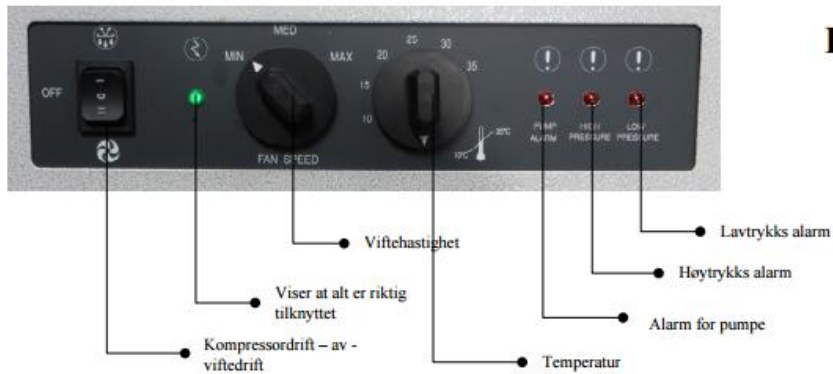

## Technical description

This compact unit consists of an inner ~ and outer unit, which are connected by hoses with quick couplings. A pump provides the circulation of the rear radiator fluid. The indoor unit has a high-pressure~ and low pressure-alarm as well as on an automatic defrosting system. The condensorheat is fed to the cooler of outdoor unit. This flexible small unit is perfect for cooling server rooms and for use at events and in stores.



**Never modify settings of the safety devices.**



**Never sprinkle water over the unit and its electrical components.**



**The machine must not be cleaned using water. To clean the machine use a wet cloth. Remember to disconnect the plug from the socket before.**



**When the machine is connected with a power socket, it must be in vertical position and any rough move must be avoided because it could cause some water to come into contact with electrical parts; it is, therefore, recommended to remove the plug from the socket before moving around the machine; if any water may have been spread on the machine, following some rough handling of the same, then, the machine must be turned off and can be started up again only after 8 hours.**



**It must not be used under explosive atmosphere.**