


Mobile Pump module PU 30

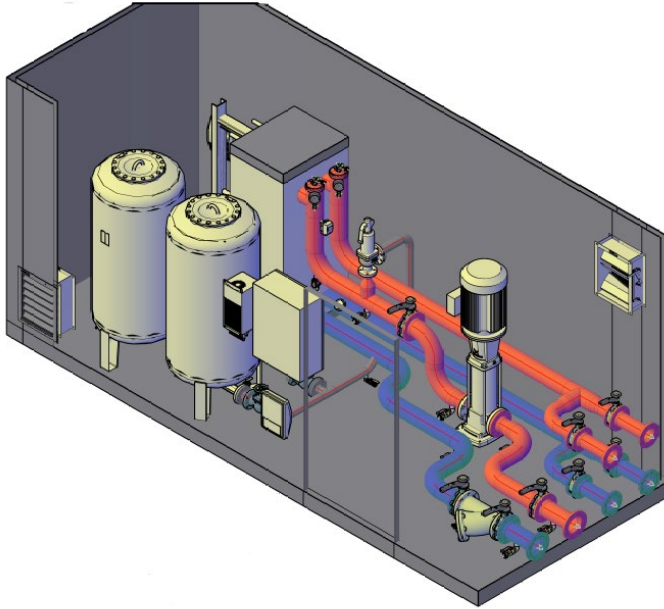

Properties

- Electronically controlled pump
- Heat exchanger 3000kW @ dT 10k
- 2 x 1000l 16bar expansion
- Surveillance
- Integrated minimum pressure monitoring
- Connection with flexible hoses
- Plug'n play

Specifications

Type of pump		CR 120-3 AFAE-HQQE (2950 rpm)
Dimensions L x W x H	mm	6060 x 2430 x 2890
Weight	kg	9000
Operational capabilities		Frequency converter
Pressure range	bar	0.2 – 16
Electrical connection	A/V	CEE 125A 5 poles / 400V
Power output	kW	30
Power input	A	56
Connection	inches	5 and 6

Subject to technical changes